

N-type TOPCon



144 Half-Cut TOPCon Cell
Bifacial Dual Glass

Model No: FST-M10.144G-XXX
(where XXX = 570 - 600)



Higher Efficiency



Bifaciality Factor : $80 \pm 10\%$



Lower Degradation



Outstanding Power Generation



PID Free/Low LID Protection




Lower Temperature Coefficient



Less Hot Spot Shading Effects



Exceptional Mechanical Resistance

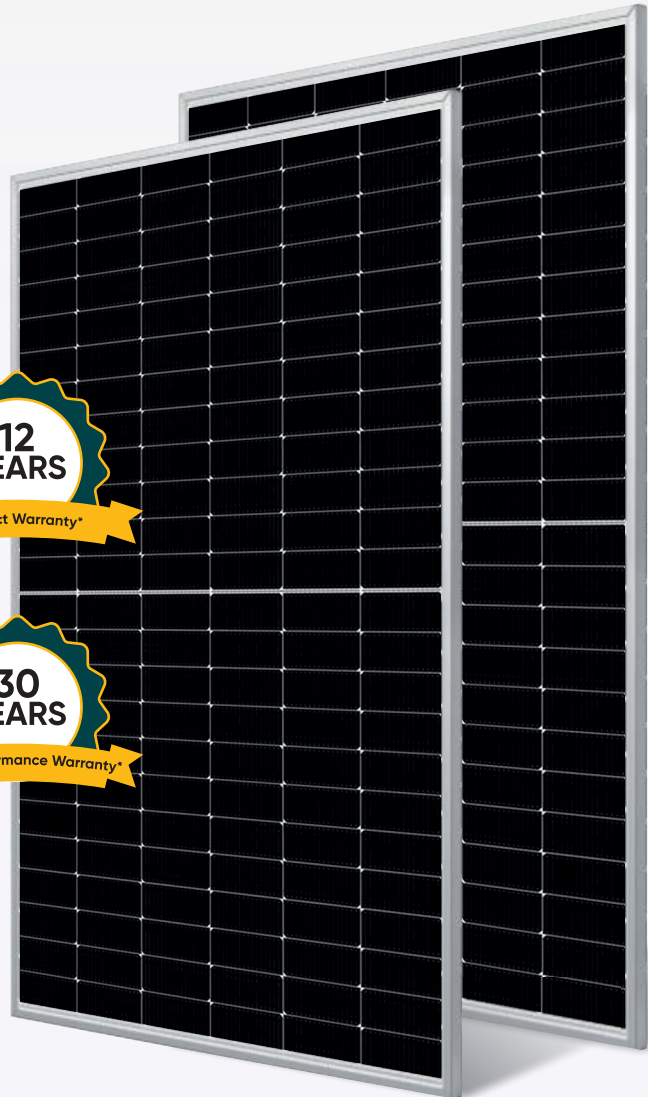

23.23%

Maximum Efficiency

600 Wp

Maximum Power Output

0~+4.99 W

Positive Power Tolerance

GRADE A

Cells Guaranteed

Certifications



BIS | IEC 61730 | IEC 61215 | UL 61730 | IEC 61701 (salt mist) | IEC 62716 (Ammonia)
IEC 61853-1 & 2 (PAN File) | LeTID | IEC 60068 (sand & dust) | IEC 62804 (PID) | CEC

For more details, please contact:

FS Green Energies Pvt. Ltd.


Corporate Office:
Samanvay House, Beside Urmi Society,
Nr. Alkapuri Haveli, Jetalpur Road,
Alkapuri, Vadodara - 390 007, Gujarat.

Manufacturing Unit:
Survey No 160, Karjan Sadhli Road,
Juni Jithardi Village, Karjan - 391 240
Gujarat.

LINEAR PERFORMANCE WARRANTY

1st Year Degradation $\leq 1\%$

2-30th Year Degradation $\leq 0.4\%$ p.a.

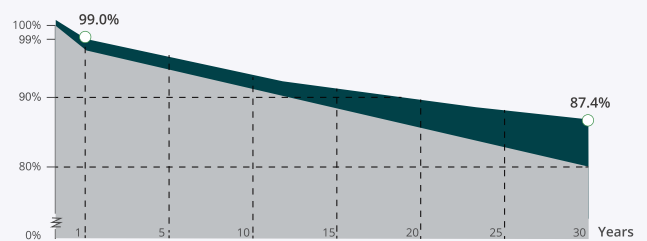

Standard Panel

Future Solar Panel



M10R Cells
16BB



Residential




Commercial &
Industrial



Utility

SOLAR PV MODULE

Half-Cut TOPCon CELL
Bifacial Dual Glass 570-600 Wp

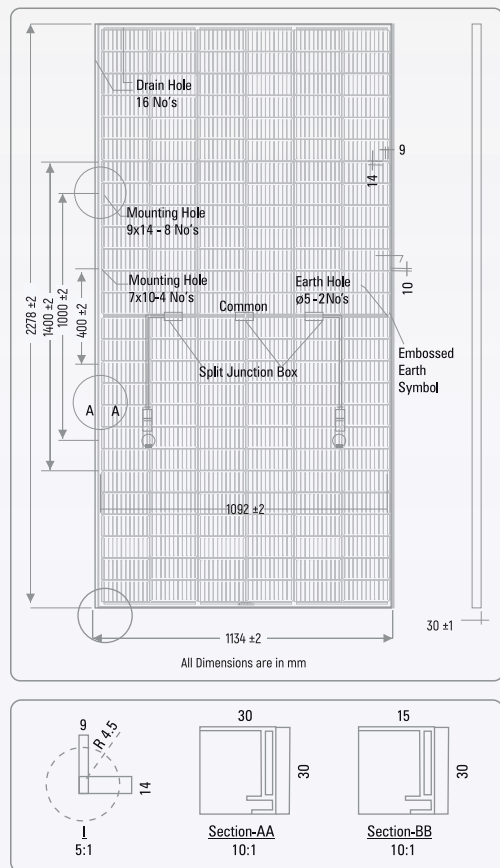


MECHANICAL SPECIFICATIONS

External Dimensions	2278 (±2mm) X 1134 (±2mm) X 30 (±1mm)
Weight	32.5 ±1 Kg
Solar Cells	16 BB, TOPCon, 182.2 X 183.75 mm (±0.5) with 144 Half Cut cells
Front Glass	2.0 mm ARC Heat Strengthened
Rear Cover	2.0 mm Heat Strengthened
Frame	Anodized Aluminium Alloy (Silver) AA ≥ 15 μm
Junction Box	3-Diode Split JB, IP 68 Rated
Connector	MC4 Connector
Mechanical Load	5400 Pa for Snow load, 2400 Pa Wind Load
Output Cable	4.0 mm²/400 mm Long (Length can be customized)

TEMPERATURE CHARACTERISTICS

Representative Data for 600Wp

Pmax Temp. Coefficient (%/°C)	-0.27
Voc Temp. Coefficient (%/°C)	-0.22
Isc Temp. Coefficient (%/°C)	0.02
Operating Temp. (°C)	-40 to + 85
Nominal Operating Cell Temp. (°C)	45±2

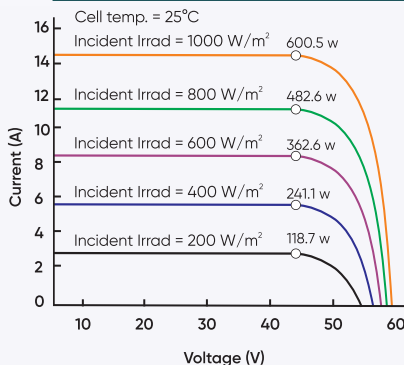

PACKING CONFIGURATION

Container	40' HQ
Pieces per Pallet	36
Pallet per Container	20
Pieces per Container	720

Note: The graphs are for reference only.
For more details consult FS technical team

ELECTRICAL CHARACTERISTICS (STC)

FST-M10.144G-XXX	570	575	580	585	590	595	600
Maximum Power, P Max (Wp)	570	575	580	585	590	595	600
Maximum Voltage, Vmp (V)	43.70	43.90	44.05	44.20	44.38	44.54	44.71
Maximum Current, Imp (A)	13.06	13.12	13.18	13.24	13.30	13.36	13.42
Open Circuit Voltage, Voc (V)	52.50	52.70	52.90	53.10	53.30	53.50	53.70
Short Circuit Current, Isc (A)	13.96	14.01	14.06	14.11	14.16	14.21	14.26
Module Efficiency (%)	22.07%	22.26%	22.45%	22.65%	22.84%	23.03%	23.23%
Fill Factor (%)	77.87%	78.01%	78.06%	78.11%	78.21%	78.27%	78.35%
Power Tolerance	0 to +4.99 W						
Maximum System Voltage	1500 V (IEC & UL)						
Maximum Series Fuse Rating	30 A						

* STC - Irradiance = 1000 W/m², Module Temperature = 25 °C and AM = 1.5

Measuring Tolerance = ±3%

ELECTRICAL CHARACTERISTICS (NOCT)

FST-M10.144G-XXX	570	575	580	585	590	595	600
Maximum Power (W)	425	429	433	436	440	444	448
Maximum Voltage, Vmp (V)	40.00	40.18	40.32	40.45	40.62	40.77	40.92
Maximum Current, Imp (A)	10.64	10.69	10.73	10.78	10.83	10.88	10.93
Open Circuit Voltage, Voc (V)	48.83	49.01	49.20	49.39	49.57	49.76	49.94
Short Circuit Current, Isc (A)	11.40	11.44	11.48	11.52	11.57	11.61	11.65

* NOCT - Irradiance = 800 W/m², AM = 1.5, Ambient Temperature = 20° C, Wind Speed = 1 m/s, Measuring Tolerance = ±3%

Gain	FST-M10.144G-XXX	570	575	580	585	590	595	600
5%	Max. Power (P max)	598.50	603.75	609.00	614.25	619.50	624.75	630.00
10%	Max. Power (P max)	627.00	632.50	638.00	643.50	649.00	654.50	660.00
20%	Max. Power (P max)	684.00	690.00	696.00	702.00	708.00	714.00	720.00
30%	Max. Power (P max)	741.00	747.50	754.00	760.50	767.00	773.50	780.00

* Bifacial Gain : The additional gain from the backside compared to the power of the front side at STC, It depends on mounting structure, Height, angle, Ground surface etc.

* The electrical data given here is for reference purpose only. • Please confirm your exact requirements with the sales representative while placing your order.

* T&C Apply

The specification and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Future Solar reserves the right to make necessary adjustment to the information described herein at any time without further notice.